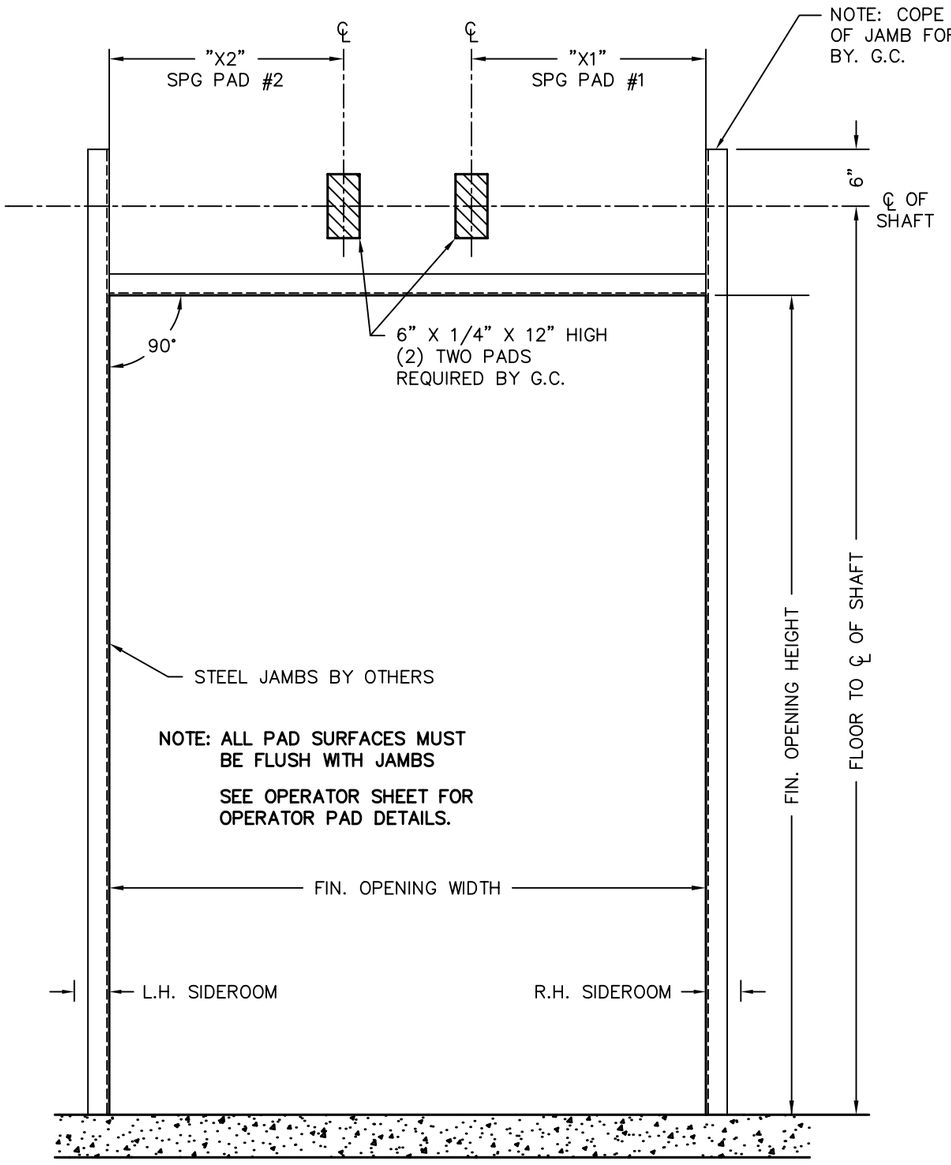

INTERIOR ELEVATION

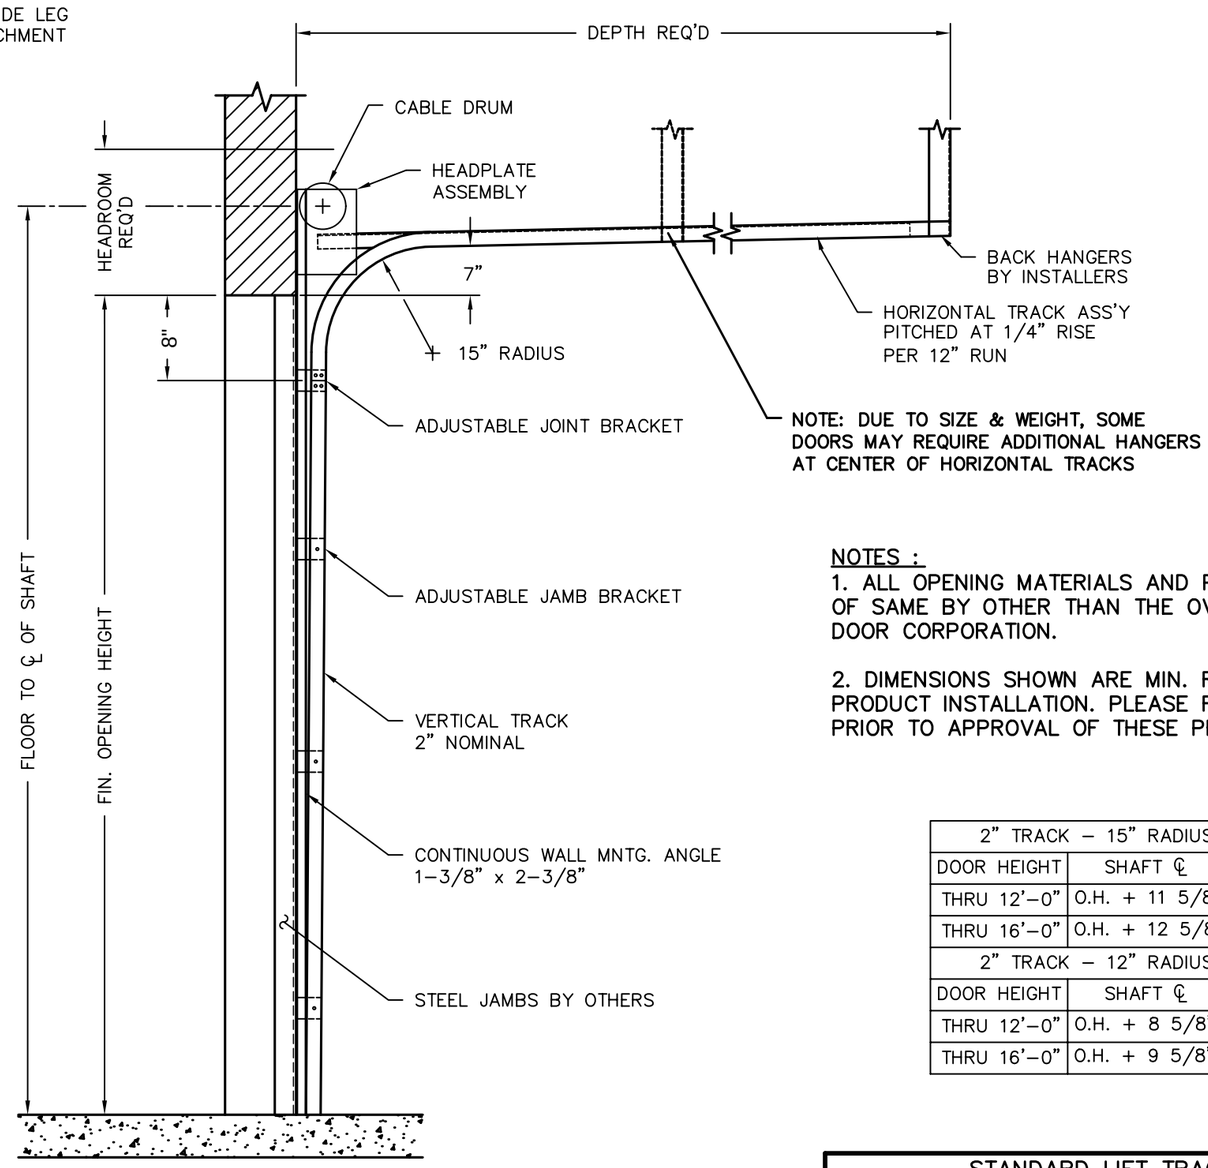

SIDE VIEW OF MOUNTED TRACK

NOTES :

1. ALL OPENING MATERIALS AND PREPARATION OF SAME BY OTHER THAN THE OVERHEAD DOOR CORPORATION.

2. DIMENSIONS SHOWN ARE MIN. REQUIRED FOR PRODUCT INSTALLATION. PLEASE FIELD VERIFY PRIOR TO APPROVAL OF THESE PRINTS.

2" TRACK – 15" RADIUS – SHAFT ℄		
DOOR HEIGHT	SHAFT ℄	MIN HEADROOM
THRU 12'–0"	O.H. + 11 5/8"	14 1/4"
THRU 16'–0"	O.H. + 12 5/8"	20 1/2"
2" TRACK – 12" RADIUS – SHAFT ℄		
DOOR HEIGHT	SHAFT ℄	MIN HEADROOM
THRU 12'–0"	O.H. + 8 5/8"	11 1/4"
THRU 16'–0"	O.H. + 9 5/8"	17 1/2"

ARCHITECT DOOR NUMBER	OVERHEAD DOOR MARK	QTY	OPENING SIZE		TRACK TYPE	TRACK PITCH	LIFT CLEARANCE	SHAFT CENTERLINE	"X1" SPRING PAD #1	"X2" SPRING PAD #2	HEADROOM REQUIRED	DEPTH REQUIRED (OPEN HT+1'–6")	LEFT HAND SIDEROOM	RIGHT HAND SIDEROOM
			WIDTH	HEIGHT										
					2"	(STD) 1/4:12	7"						5"	5"
					2"	(STD) 1/4:12	7"						5"	5"
					2"	(STD) 1/4:12	7"						5"	5"
					2"	(STD) 1/4:12	7"						5"	5"

STANDARD LIFT TRACK

PROJECT

ARCHITECT

CONTRACTOR

DISTRIBUTOR

PLANT NEBRASKA

DISTRIBUTOR DWG. NO.

DATE:

SHEET

BY:

THE GENUINE. THE ORIGINAL. "OVERHEAD DOOR"